



## 600D Series Wall-mount Network Cabinet

### 19 inch Wall Mount Rack







#### Standard

Accord with IEC297-2, GB/T4208-2017, GB4943.1-2011, JB/T 10216-2013 Standard; **IP20** 

#### **Key Features**

- •Flat pack can be save the shipping fees and storage cost;
- •Standing floor and wall mount type available, can be install caster wheels,
- reserved the mounting holes and wall mounting holes,
- use 4 expansion screws for installation;


#### **IP** rating

#### **Specification**

- Equipment implementation compliant with 19" RACK standard,
- Install holes spacing 465mm, vertical beam spacing 450mm;
- RAL9004 Black & RAL 7035 Light grey, other colors can be customized;
- Glass front door, other style can be customized;
- •Cable entry on the top, bottom and rear side which is convenient installation of cables, •Panels thickness 0.9mm, vertical beam thickness 1.5mm,
- which facilitates mounting of non-standard devices;
- •Side panels can be removable, easy-to-install and wiring structural;
- •There has 1 vent space on the top to provide much better airflow and cooling
- **Parts view**

- other thickness can be customized;
- •Cooling fans hole spacing 105mm;
- •The hole diameter of caster wheels and wall mount are 10mm;

• capacity ≥60kg

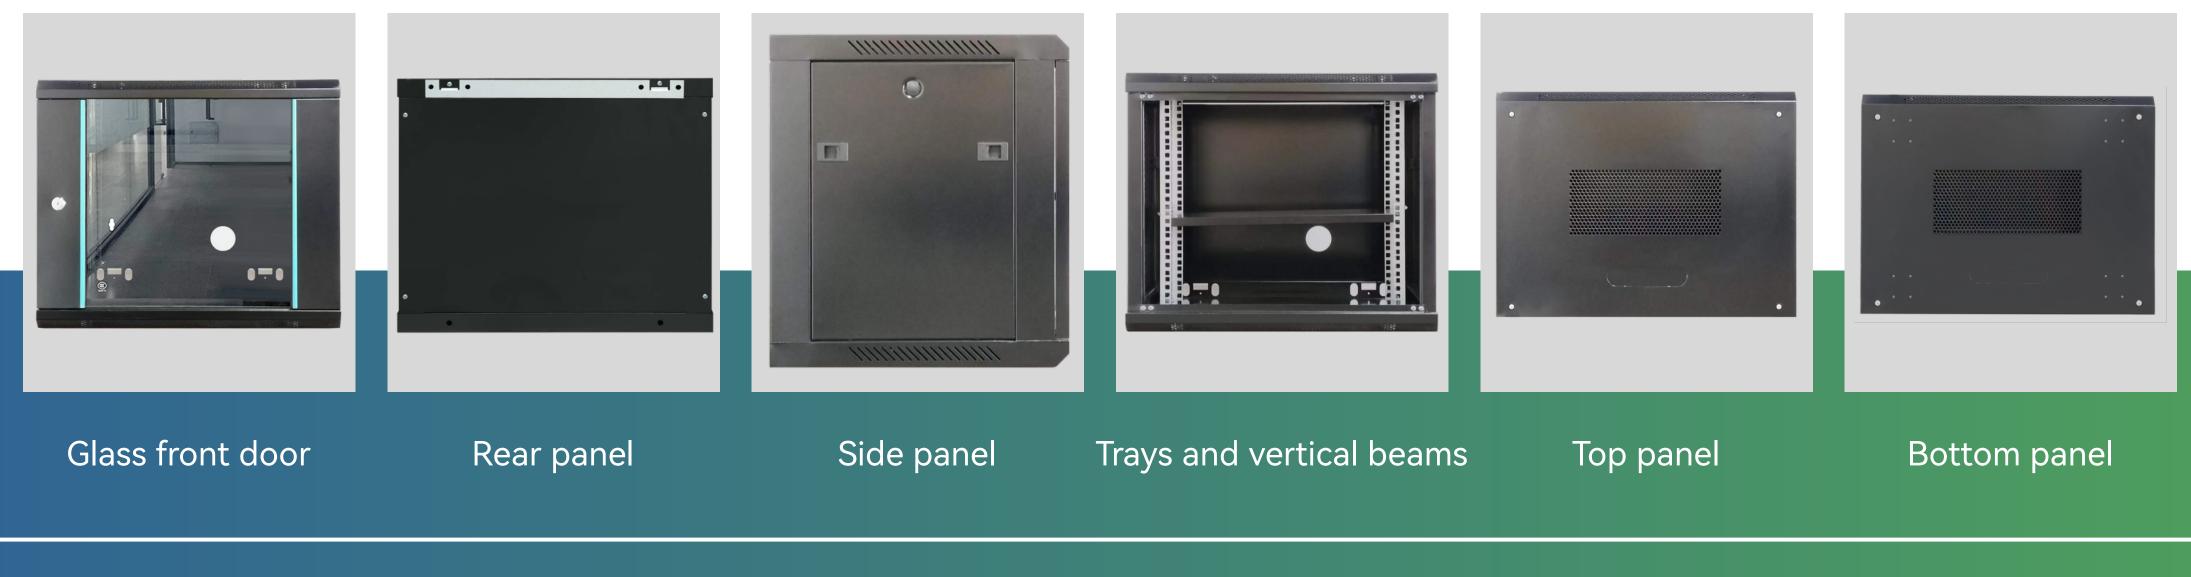


www.htyzcn.com

sales1@htyzcn.com







## Exploded View

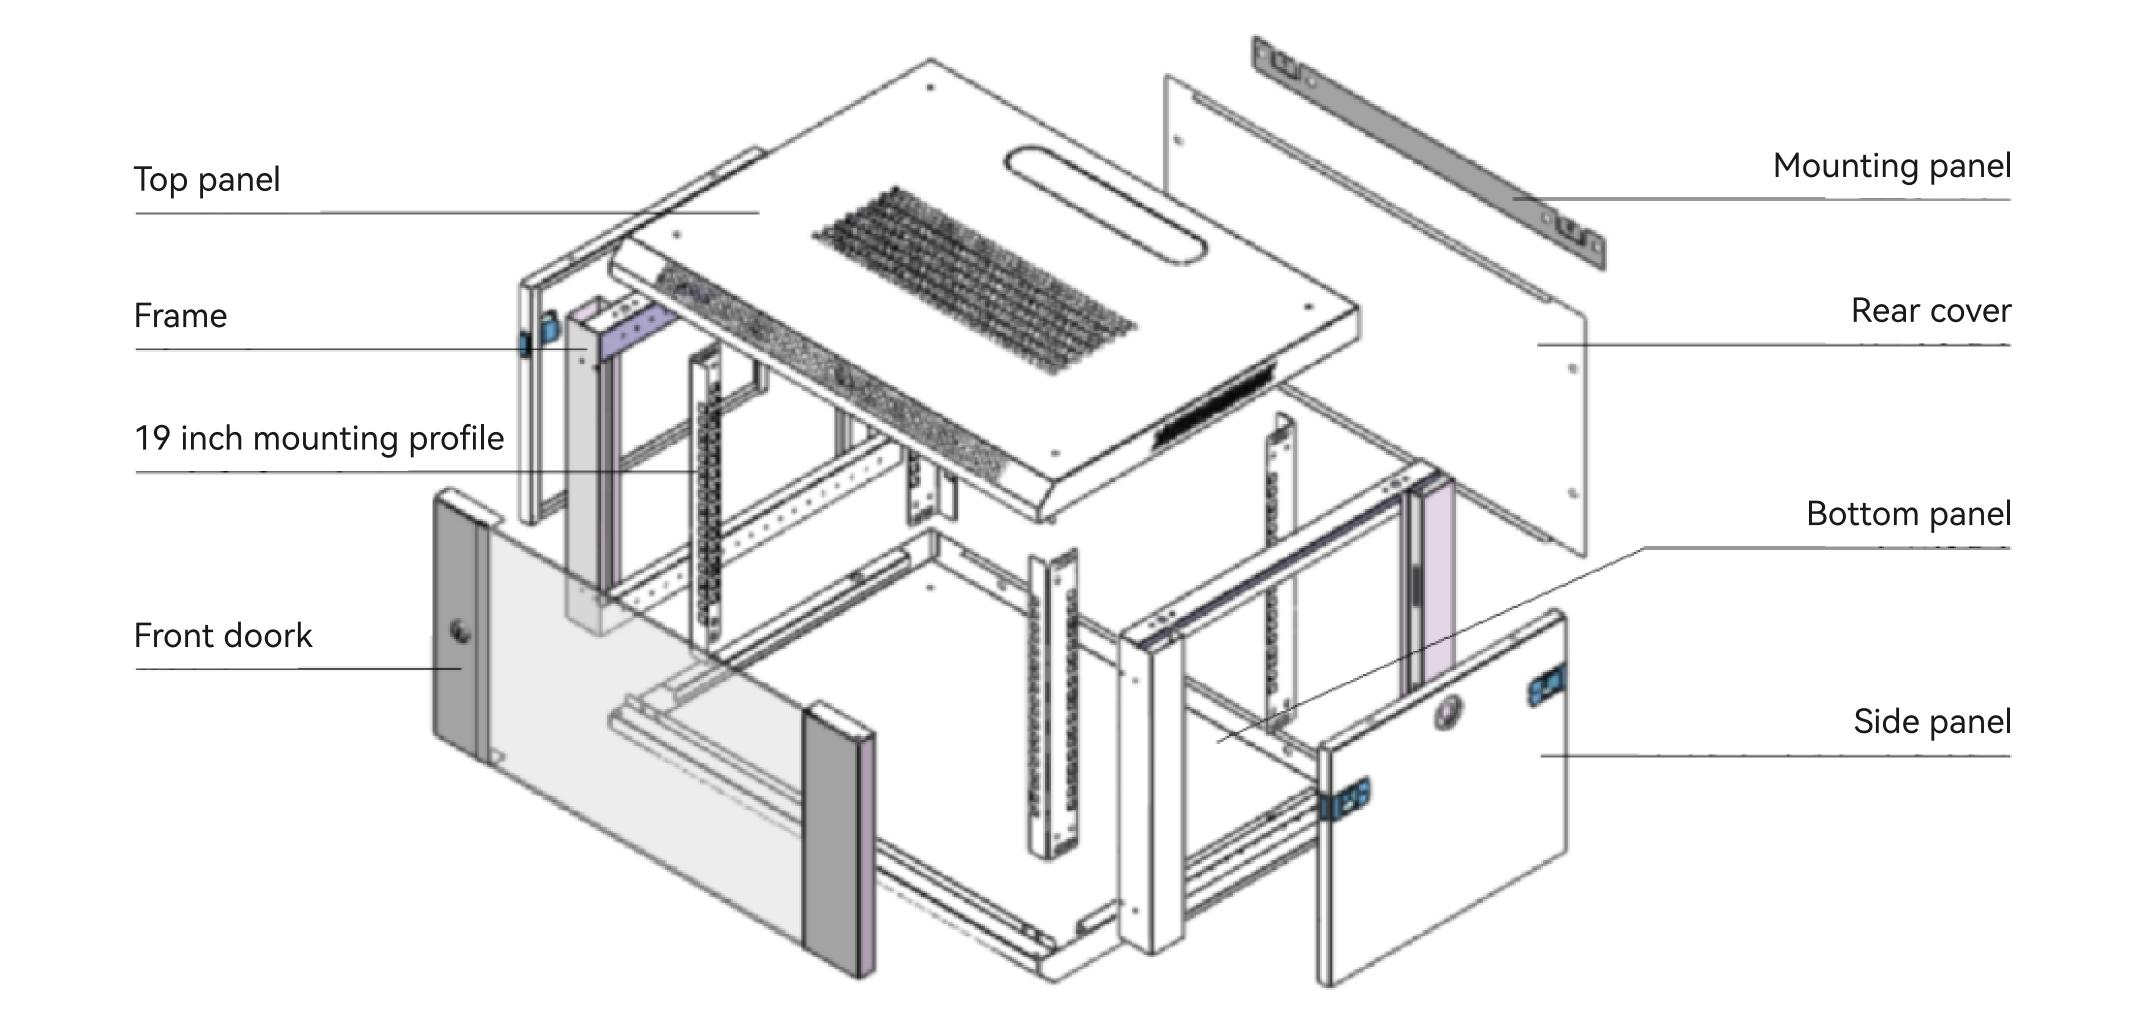



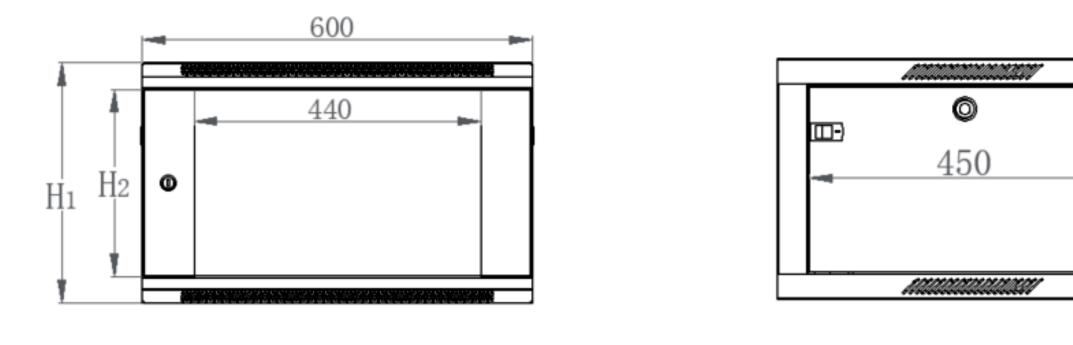

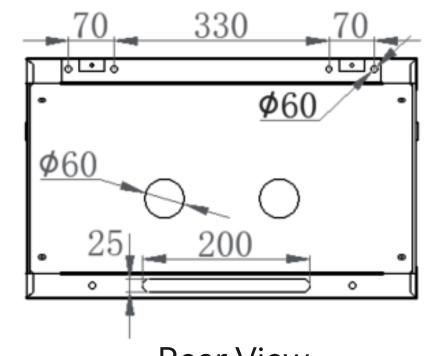


Front View

Side View

-----

Rear View

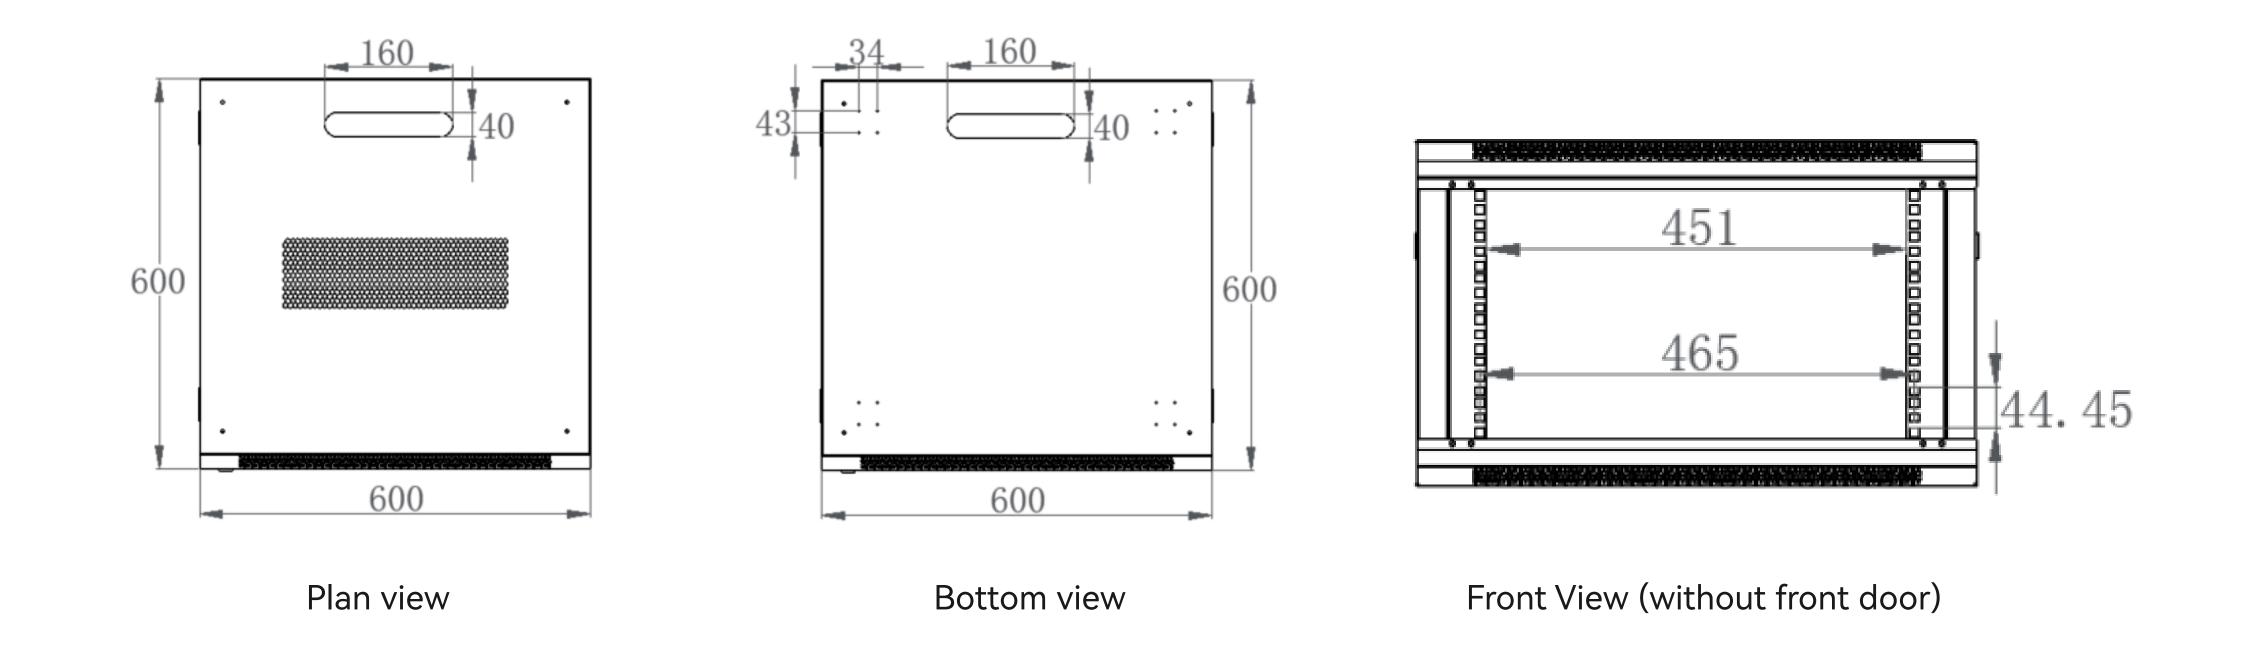






### Accessories

No.	Key Parts	Quantity	Unit	Material	Surface treatment	Remark
1	Top panel	1	Piece	Thickness ≥0.9mm,SPCC Cold Rolled Steel Panels	Electrostatic powder coating	
2	Bottom panel	1	Piece	Thickness ≥0.9mm,SPCC Cold Rolled Steel Panels	Electrostatic powder coating	
3	Side panel	2	Piece	Thickness ≥0.9mm,SPCC Cold Rolled Steel Panels	Electrostatic powder coating	
4	Frame	2	Piece	Thickness ≥0.9mm,SPCC Cold Rolled Steel Panels	Electrostatic powder coating	
5	Rear Cover	1	Piece	Thickness ≥0.9mm,SPCC Cold Rolled Steel Panels	Electrostatic powder coating	
6	Front door	1	Piece	≥5mm tempered glass	Electrostatic powder coating	Or mesh door
7	Vertical mounting beam	4	Piece	Thickness ≥1.5mm,SPCC Cold Rolled Steel Panels	galvanized	
8	Mounting panel	1	Piece	Thickness ≥1.5mm,SPCC Cold Rolled Steel Panels	galvanized	
9	Tray	1	Piece	Thickness ≥0.9mm,SPCC Cold Rolled Steel Panels	Electrostatic powder coating	
10	Front door lock	1	Piece	Metal plate	galvanized	Included 2 keys
11	Caster wheels	4	Piece	Metal plate	galvanized	Only used for ≥12U
12	network cabinet mounting screw	/s 30	Piece	Metal plate	Galvanized processing,sliver	Only used for <12U
13	network cabinet mounting screw	/s 46	Piece	Metal plate	Galvanized processing,sliver	Only used for ≥12U
14	Tray mounting screws	4	Piece	Metal plate	Galvanized processing,sliver	
15	Equipment mounting screws	10	Piece	Metal plate	Galvanized processing,	

# Specification

Part Number Information	U size	Dimensions(H*W*Dmm)
MT6606S	6	350*600
MT6609S	9	500*600
MT6612S	12	640*600
MT6615S	15	800*600
MT6618S	18	1000*600*600
MT6622S	22	1200*600*600



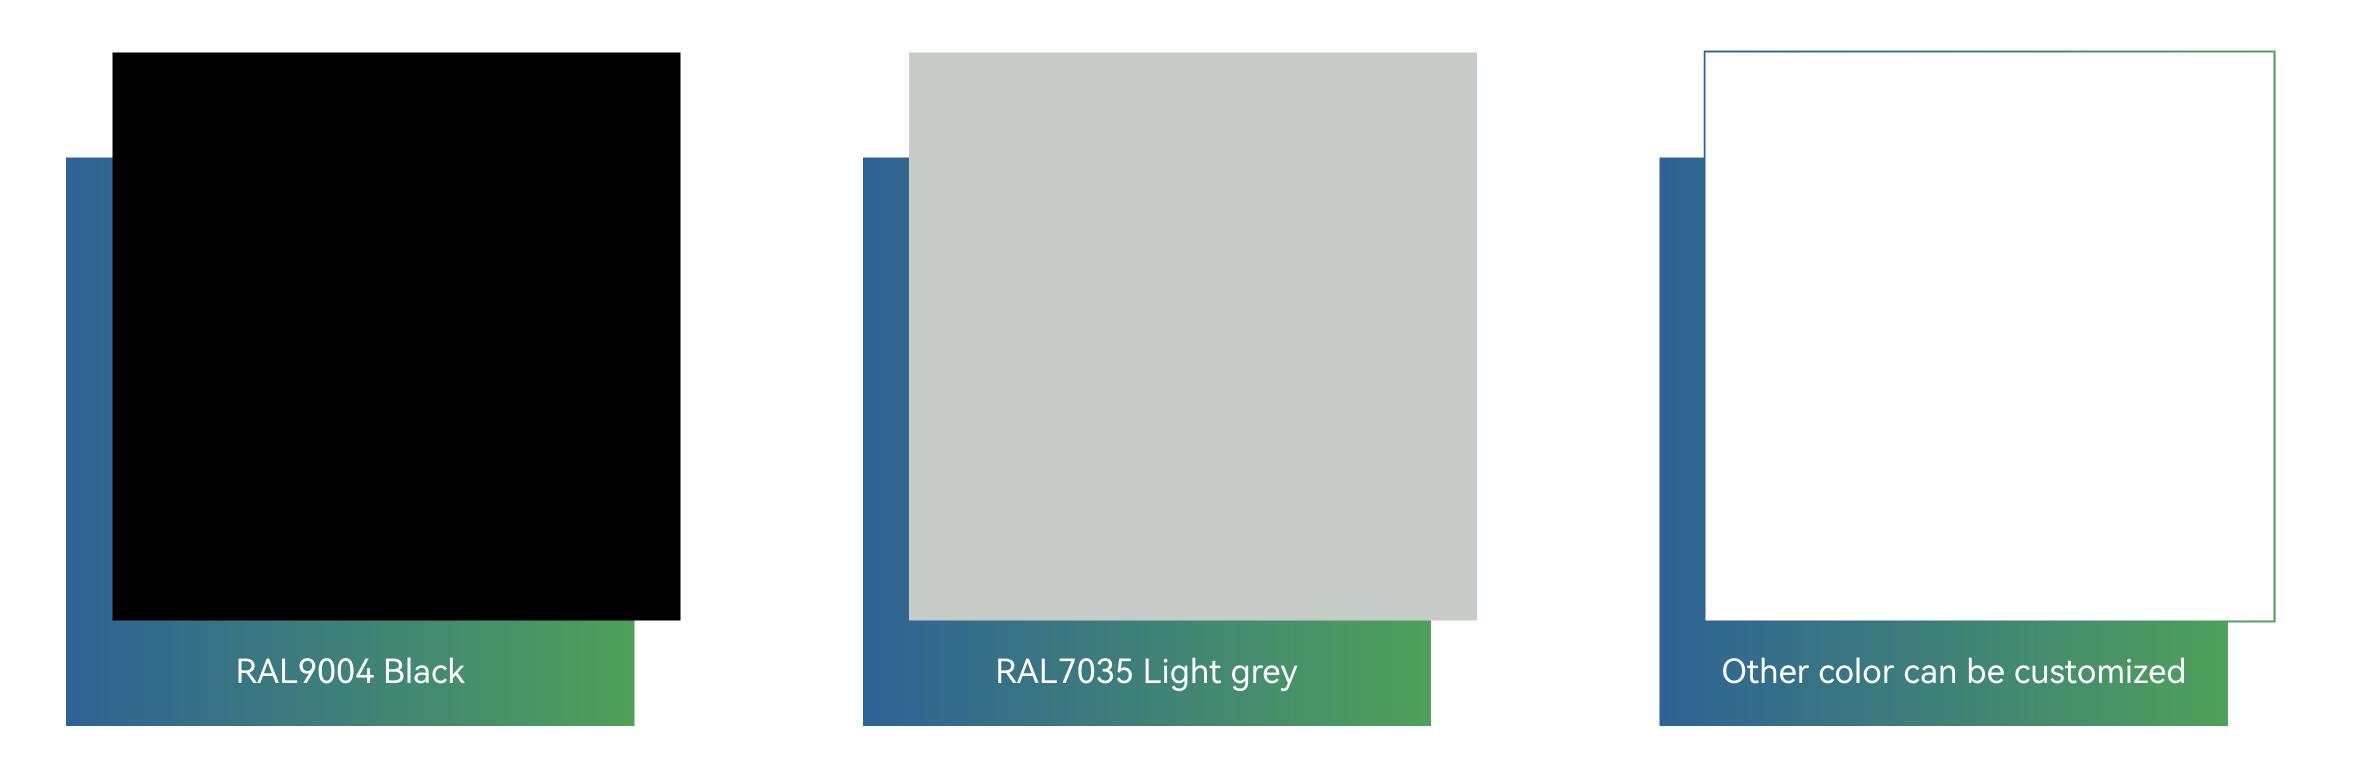

www.htyzcn.com

sales1@htyzcn.com